




## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification <sup>6</sup> : <b>G06F 17/30</b>		A1	(11) International Publication Number: <b>WO 98/07103</b>
			(43) International Publication Date: 19 February 1998 (19.02.98)
(21) International Application Number: PCT/CA97/00571 (22) International Filing Date: 14 August 1997 (14.08.97) (30) Priority Data: 2,183,280 14 August 1996 (14.08.96) CA (71) Applicant (for all designated States except US): TELE- VITESSE SYSTEMS INC. [CA/CA]; 603 March Road, Kanata, Ontario K2K 2M5 (CA). (72) Inventors; and (75) Inventors/Applicants (for US only): MENARD, Rob [CA/CA]; 168 Oakridge Boulevard, Nepean, Ontario K2G 2V2 (CA). STREATCH, Paul [CA/CA]; P.O. Box 1196, Richmond, Ontario K0A 2Z0 (CA). MACLEAN, Roger [CA/CA]; 90 Saint Claire Avenue, Nepean, Ontario K2G 2A6 (CA). REED, Jim [CA/CA]; 26 Shepherds Glen Avenue, Kanata, Ontario K2M 2M9 (CA). (74) Agent: MITCHELL, Richard, J.; Marks & Clerk, P.O. Box 957, Station B, Ottawa, Ontario K1P 5S7 (CA).		(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, HU, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO patent (GH, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).  Published With international search report.	

(54) Title: CENTRALIZED BROADCAST CHANNEL REAL-TIME SEARCH SYSTEM

## (57) Abstract

A system for monitoring broadcast channels, includes a device for receiving a plurality of broadcast channels, a central search engine operable to search the received channels for a match with a pre-stored profile, a central memory connected to the search engine for storing the profile, and a plurality of user terminals connected to the search engine over a network. The search engine is responsive to commands from the user terminals to store the profiles to be searched in the memory in association with the identity of the user terminal from which the command was received. A device sends an alert signal over the network when a match is found with a pre-stored profile. The alert signal identifies the broadcast channel matching the pre-stored profile.

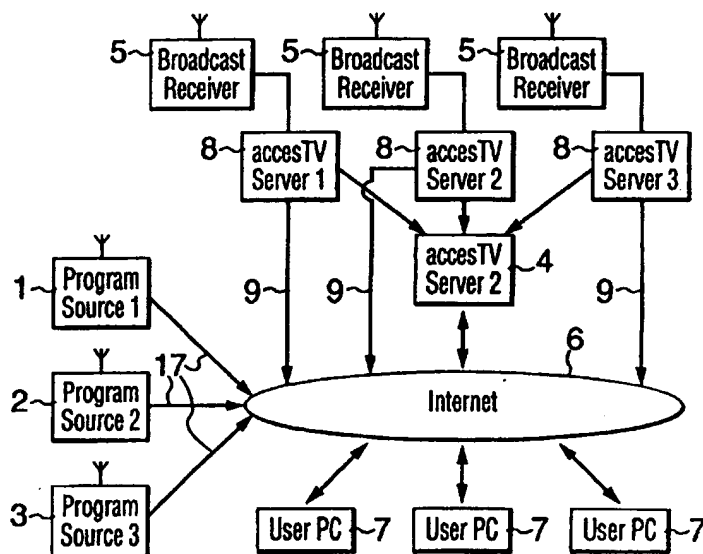

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav	TM	Turkmenistan
BF	Burkina Faso	GR	Greece		Republic of Macedonia	TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's	NZ	New Zealand		
CM	Cameroon		Republic of Korea	PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakhstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

- 1 -

## CENTRALIZED BROADCAST CHANNEL REAL-TIME SEARCH SYSTEM

This invention relates to a system for monitoring broadcast channels, and in particular to a centralized system that permits a user to remotely query multiple broadcast channels for program content of interest.

5 Our co-pending application no. PCT/CA96/00131, which is herein incorporated by reference, describes an automatic broadcast monitoring system that allows a user to automatically monitor TV channels on a PC equipped with a video card. The system includes a search engine that allows the user to input selected keywords. The search engine continually monitors the closed caption stream accompanying the broadcast  
10 material to find a keyword match and identify program material of interest to the user.

While this system offers an extremely powerful search facility, it ties up resources in the user's PC on an on-going basis as it looks for a match. It also consumes considerable bandwidth to the user's location since the PC must continually receive the broadcast channels in order to monitor them.

15 An object of the invention is to alleviate this disadvantage.

According to the present invention there is provided a system for monitoring broadcast channels, comprising means for receiving a plurality of broadcast channels, a central search engine operable to search said broadcast channels for a match with pre-stored profiles, a memory connected to said search engine for storing said profiles, a  
20 plurality of user terminals connected to said search engine over a network, said search engine being responsive to commands from said user terminals to store said profiles in said memory in association with the identity of the user terminal from which a said command was received, and means for sending an alert signal over said network when a match is found with a said pre-stored profile to the user terminal associated with said pre-  
25 stored profile, said alert signal identifying the broadcast channel matching the pre-stored profile.

The broadcast channels will normally be television channels, although the invention is applicable to other media, such as radio channels.

- 2 -

The user terminals are conveniently PCs equipped with software for displaying video received in digital form. In accordance with the invention, the PCs can send instructions to the central search engine. This operation only requires a very small amount of bandwidth. The search engine then carries out the monitoring function for a large  
5 number of users, for example, on a subscription basis, and only contacts the users when a match is found.

The invention is particularly well suited for Internet applications, although it can also be used over intranets and local area networks.

Many broadcast stations are planning to multicast or unicast over the Internet, so  
10 the alert signal can include the Internet address of a program source to enable this to be connected directly to the requesting user. Alternatively, the system can supply the broadcast material to the Internet or other network through servers, in which case the alert signal will include the address of the appropriate system server.

The invention thus avoids the need to send bandwidth intensive broadcast signals  
15 to the user from the search engine, nor for the user to receive unwanted broadcast signals.

It is expected in the future that many users will receive "broadcast" channels via the Internet. Such dissemination of material, where there are a finite number of connected user is usually referred to as "multicasting", but in this specification the term  
"broadcasting" is used to include "multicasting". In the case of signals broadcast over the  
20 Internet, the invention has the capability of substantially reducing the amount of bandwidth consumed.

As described in our co-pending application, the pre-stored profiles are conveniently keywords that are compared to the closed caption stream associated with the broadcast signals, although other forms of pattern recognition can be used as the  
25 technology becomes available.

The invention also provides a method of monitoring broadcast channels from a central location for a plurality of distributed users, comprising the steps of receiving a plurality of broadcast channels at a central location, responding to commands over a network from distributed user terminals to store profiles specifying search criteria at said

central location, continually searching said broadcast channels for a match with said pre-stored profiles, and sending an alert signal over said network when a match is found with a said pre-stored profile to the user terminal associated with said pre-stored profile, said alert signal identifying the broadcast channel matching the pre-stored profile.

5       The invention will now be described in more detail, by way of example, only with reference to the accompanying drawings, in which:-

Figure 1 is a block diagram of a remote monitoring system in accordance with the invention; and

Figure 2 is a more detailed block diagram of parts of the system; and

10       Figure 3 is a flow chart illustrating the operation of a search server used in the remote monitoring system.

Figure 1 shows three television stations, program source 1, program source 2, and program source 3, which broadcast television programs on pre-assigned channels in a conventional manner. Typically, a practical system will monitor 50 to 200 such channels.

15       The program sources may be broadcasting over the airwaves, via the Internet or cable. The transmission medium employed is not relevant to the invention.

The television stations transmit a closed caption stream in line twenty-one of the vertical blanking interval in a manner known per se. The closed caption stream can be extracted with a suitable decoder to create a text stream related to the program material  
20       being broadcast at any time. The text stream was originally intended to be displayed, for example, as sub-titles on the television set of hearing impaired persons.

Our co-pending application referred to above describes a technique for monitoring the closed caption stream to identify pre-stored keywords, and in the event of a match take certain actions, such as generating an alert signal or recording a current program clip for  
25       later review.

These channels are received by broadcast receivers 5 and output to servers 8, which digitize the video and audio signal for output as a multimedia signal 9, for example in MPEG format, and also generate a time-tagged text stream for input to search server 4. The digitized multimedia signal 9 is made available to the Internet 9.

- 4 -

The use of servers 8, which can be AccessTV™ servers from Televitesse Systems Inc., frees up the search server 4 from processing the audio and video portion of the broadcast, thus allowing the search server 4 to monitor many sources. One server is provided for each monitored channel.

- 5       The broadcast receivers 5 can receive channels as direct broadcast signals, via satellite, or alternatively as broadband signals over a wide area network, such as the Internet. The broadcast signals can, for example, be transmitted in compressed format, such as MPEG.

- 10       The central search server 4 is connected via the Internet 6 to a plurality of user terminals 7, normally in the form of personal computers (PC's). The users act as clients to the search server 4. Each user can, at any time, establish a virtual connection over the Internet to the search server 4 and input a particular search profile. For example, this might be a request to search all available channels for a particular sequence of keywords. By way of example, a typical request might be to look for occurrence of the words
- 15       "Clinton" and "Middle East" in a sequence of say twenty words in order to locate a clip of Bill Clinton talking about the Middle East. When a match is found, the search server 4 sends an alert signal back over the Internet to the address of the requesting PC. The user can specify that the search server is to search through all available channels or only a limited number, for example, news channels or stock market channels and the like. Such
- 20       requests are stored in the user profile memory to be described below.

- 25       The alert signal is interpreted by the requesting PC 7 to take certain actions. Such actions can simply be an alert to the user that a particular station is broadcasting program material of interest, for example in the form of a dialog box displayed on the screen, showing the channel number of the program source, or alternatively, for example,
- 25       activation of the appropriate channel on the user's PC 7 or television set.

- 30       Alternatively, the alert signal may include the IP address of the server 8 providing the multimedia version of the program of interest. This can be used to set up a virtual connection to the relevant server 8 so to transmit the program material directly to the user's PC 7 over the Internet. The user's PC 7 can be programmed to start recording the program material automatically on receipt of the alert signal. A clip of a user-specifiable

- 5 -

length, say two minutes, can then stored on the user's PC for later access. To allow the user to capture program material leading up to the word match, the servers 8 can delay the transmission of the multimedia signal by a predetermined amount, for example, thirty seconds, relative to the transmission of the text stream.

5           In an alternative embodiment, if the identified station is multicasting over the Internet via optional links 17, the alert signal can include a message identifying the IP address of the source station and instructing the requesting user's PC to connect directly to the source station via the Internet and display the program material on the screen or store it, preferably in compressed format, for later use.

10           While the network 6 has been described as the Internet, it will be understood that it can be any form of network, for example, a LAN or an intranet, which is an in-house version of the Internet, i.e. a network interconnecting a plurality of LANs.

Figure 2 is a more detailed block diagram of the system.

15           For each channel, a video signal, for example, from each broadcast receiver 5, via satellite or from the Internet, is passed to video capture card 15 and audio card 16 installed in a computer forming the server 8, and to closed caption decoder 18, which can be a suitable commercially available unit. The output of the decoder 18 is passed to serial port 11 of the computer 10. As indicated above, there will normally be one server for each channel.

20           The outputs of the video card 15, audio card 16, and serial port 11 are passed to server engine 12, which outputs the text stream onto a LAN 14, and the video and audio in multimedia format on outputs 9, for connection to the Internet 6.

25           The time-tagged text streams from all sources are passed over LAN 14 to central search server 4, where they are processed in a manner to be described. The text-streams include the network address, which can conveniently be in the form of an IP address, of the originating TV server 8.

The search server 4, also a computer, comprises a user profile memory 20, a search engine 21, a network card 22 for connection to LAN 14 and an Internet port 23 for connection to the Internet 6 or other network.

- 6 -

In operation, any user PC 7 knowing the IP address of the search server 4 can send a request over the Internet 6 to set up a particular search profile, which is stored in user profile memory 20. Such a request only requires a small amount of bandwidth since it consists merely of an instruction to the search server 4.

5           The search server 4 stores the profile in the memory 20 in association with the Internet address of the requesting user PC 7. The search server 4 then operates in a manner similar to that described in our co-pending application noted above until a match is found for each user profile. In this event, search engine 21 looks up in the memory 20 the address of the requesting user and sends a signal back over the Internet 6 to the  
10       appropriate user PC 7, identifying the channel where the match was found by sending the IP address of the source server 8, which accompanies the text stream on the LAN 14. This alert signal requires only a small amount of bandwidth since it does not contain program material, but merely identifying data for the program material.

15           The user profile memory 20 is capable of storing a large number of requests from diverse users and continually searching for matching profiles. The described system therefore lends itself particularly well to the provision of a centralized search service that accepts request from subscribers who can be billed on a usage basis.

20           Referring to Figure 3, the search engine 21 starts by waiting for a text stream to arrive over LAN 14 from the servers 8 at block 30. It then extracts the next word for processing at block 31. In block 32, the search engine 21 gets the next user profile search from memory 20 and in decision unit 33, it determines whether the current user profile contains a word matching the text stream word. If yes, the search engine 21 notifies at block 34 the user PC 7 via the Internet port 23, sending a message identifying the source of the program material so that the user can view or record the material of interest.

25           After the current profile has been processed, the decision unit determines whether there are more profiles in the memory 20, and if yes, the block 32 extracts the next profile and the steps represented by blocks 32 and 33 are repeated as appropriate.

When all the profiles have been exhausted, the Decision unit 37 determines whether more text is available, and if so block 31 moves on to the next word.



- 7 -

The system has been described with reference to a single word match for convenience, although it will be understood that the system will also work using Boolean logic on any number of words occurring within a specified number of words in the same manner as our copending application referred to above. Such Boolean logic can include the usual operators such as "and", "or", "near" etc.

In the preferred implementation, when the search engine 21 reads in a user profile, it builds an index that maps all the search words to the corresponding user profiles. This allows a subset of user profiles that contain a particular search word to be searched in a single step so that a large number of user profiles can be monitored in real time.

When a match is found, the search engine can send to the user PC 7 corresponding to the current search profile, the IP address of the broadcasting channel if the channel is being directly multicast onto the Internet6 or alternatively the IP address of the AccessTV server 9, which provides a multimedia signal 9. In one embodiment, it is envisaged that a central search service provides multicast services for broadcasters using the AccessTV servers 8.

As discussed above, the AccessTV servers 8 can include buffers for storing a specified segment of video to delay the video relative to the text stream and thereby permit the user to view a program segment preceding a word match. In the embodiment described above, the program material is stored on the user's PC. In an alternative embodiment, the search server 4 can send a signal back to the relevant TV server 8 when a match is found instructing it to store a segment of video before and after the occurrence of a matched word under a specified file name, usually in AVI format, so that when a user PC 7 responds to an alert signal from the search server 4, the user can look up the stored file representing a segment of video of interest. For example, the server 8 might store the previous 30 seconds and following 90 seconds of video around a word match in a file accessible to the user, who would then be free to download the entire file over the Internet 6 for viewing at leisure.

Because the invention is based on a centralized server concept, the search engine can be made vastly more powerful than is practical for an individual user.

- 8 -

The central server 4 also has the ability to collect usage statistics from a large number of users and this information can be used for targeted advertising, for example.

In another embodiment, the real-time search streams may be concatenated into one multiplexed stream with the search server 4 unpacking the concatenated streams prior to  
5 performing the search.

In yet another embodiment, the alert signal can simply be in the form of an e-mail message sent to the user's e-mail mail address. The e-mail message can identify the time and channel of the matched program, and also, if desired, be accompanied by a clip of captured text. If the embodiment is employed wherein the central service stores the clips  
10 for the user's, the e-mail message can include the filename of the stored clip so that the user can download it at his leisure even if his PC is switched off when the alert occurs.

## Claims:

1. A system for monitoring broadcast channels, comprising:
  - a) means for receiving a plurality of broadcast channels;
  - b) a central search server operable to search said broadcast channels for a match
- 5 with pre-stored profiles;
  - c) a memory connected to said search engine for storing said profiles;
  - d) a plurality of user terminals connected to said search engine over a network,said search engine being responsive to commands from said user terminals to store said profiles in said memory in association with the identity of the user terminal from which a
- 10 said command was received; and
  - d) means for sending an alert signal over said network when a match is found with a said pre-stored profile to the user terminal associated with said pre-stored profile, said alert signal identifying the broadcast channel matching the pre-stored profile.
2. A system as claimed in claim 1, further comprising a channel server associated
- 15 with each monitored channel, said channel server providing a closed caption text stream to said search server for matching with said pre-stored profiles.
3. A system as claimed in claim 2, wherein said channel servers also output to said network a multimedia stream containing a digitized multimedia version of said broadcast channels.
- 20 4. A system as claimed in claim 3, wherein said channel servers delay the multimedia version of the broadcast channels so as to permit the user to access a program segment immediately preceding the occurrence of a match.
5. A system as claimed in claim 3, wherein said search server contains a search engine receiving said text stream from said TV servers over a LAN.
- 25 6. A system as claimed in claim 5, wherein said search server extracts the address of the server associated with particular text from the originating address on the LAN.
7. A system as claimed in claim 6, wherein said search engine creates an index of search words contained in said pre-stored profiles that maps said words to the pre-stored

- 10 -

profiles in which they occur so that all the profiles containing a matched word can be searched at the same time.

8. A system as claimed in claim 1, wherein said user terminals are adapted to receive said broadcast channels directly over said network from their respective sources, and said  
5 alert signal includes the address of the source of said broadcast channels on said wide area network.

9. A system as claimed in claim 3, wherein said user terminals are adapted to receive said broadcast channels directly over said network from said channel servers in multimedia format and said alert signal includes the network address of the originating  
10 channel server.

10. A system as claimed in claim 4, wherein said user terminals comprises personal computers.

11. A system as claimed in claim 2, wherein said pre-stored profile consists of one or more keywords selected by the user and said search engine searches said closed caption  
15 text accompanying said broadcast channels to locate said one or more keywords and thereby identify program content of interest to the user.

12. A system as claimed in claim 8, wherein said network is the Internet and said address includes the IP address of said source.

13. A system as claimed in claim 1, wherein said search server instructs a said channel  
20 server to store a multimedia segment corresponding to a match for later retrieval by a user.

14. A system as claimed in claim 1, wherein said alert signal is in the form of an e-mail message to the user identifying the program source.

15. A method of monitoring broadcast channels from a central location for a plurality  
25 of distributed users, comprising the steps of:



- a) receiving a plurality of broadcast channels at a central location;
- b) responding to commands over a network from distributed user terminals to store profiles specifying search criteria at said central location;
- c) continually searching said broadcast channels for a match with said pre-stored

profiles; and

d) sending an alert signal over said network when a match is found with a said pre-stored profile to the user terminal associated with said pre-stored profile, said alert signal identifying the broadcast channel matching the pre-stored profile.

- 5 16. A method as claimed in claim 15, wherein the pre-stored profiles contain keywords, and said keywords are compared with a closed caption text stream associated with said channels.
17. A method as claimed in claim 16, wherein an index is built of all keywords in said profiles, said index mapping the keywords to the profiles containing them, whereby all the  
10 profiles containing a keyword can be searched simultaneously.
18. A method as claimed in claim 15, wherein said broadcast channel is made available on the network in multimedia format, and said alert signal contains the network address of the multimedia source of the matched channel.
19. A method as claimed in claim 18, wherein a program segment corresponding to a  
15 match is stored at the central location for later retrieval by a user.
20. A method as claimed in claim 18, wherein the multimedia output is delayed relative to the text stream to permit the user to access a program segment immediately preceding a match.
21. A method as claimed in claim 18, wherein said alert signal activates the user  
20 terminal to display automatically a matched channel.
22. A method as claimed in claim 18, wherein said alert signal is in the form of an e-mail message identifying the matched channel.

1/2

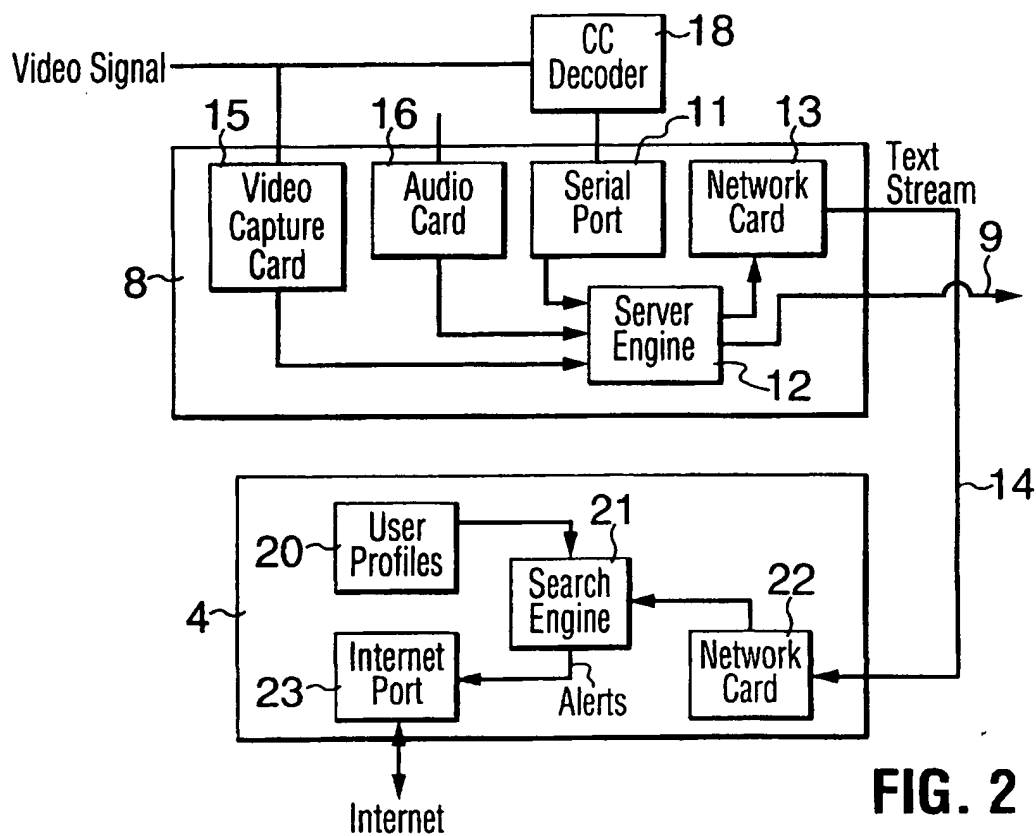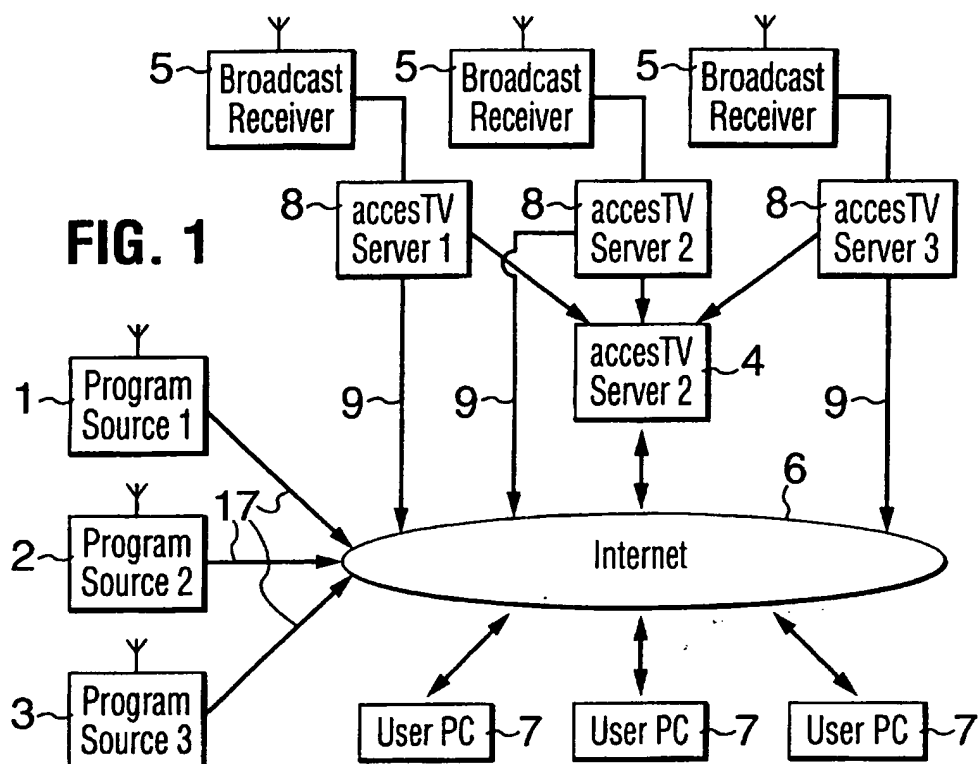

2/2

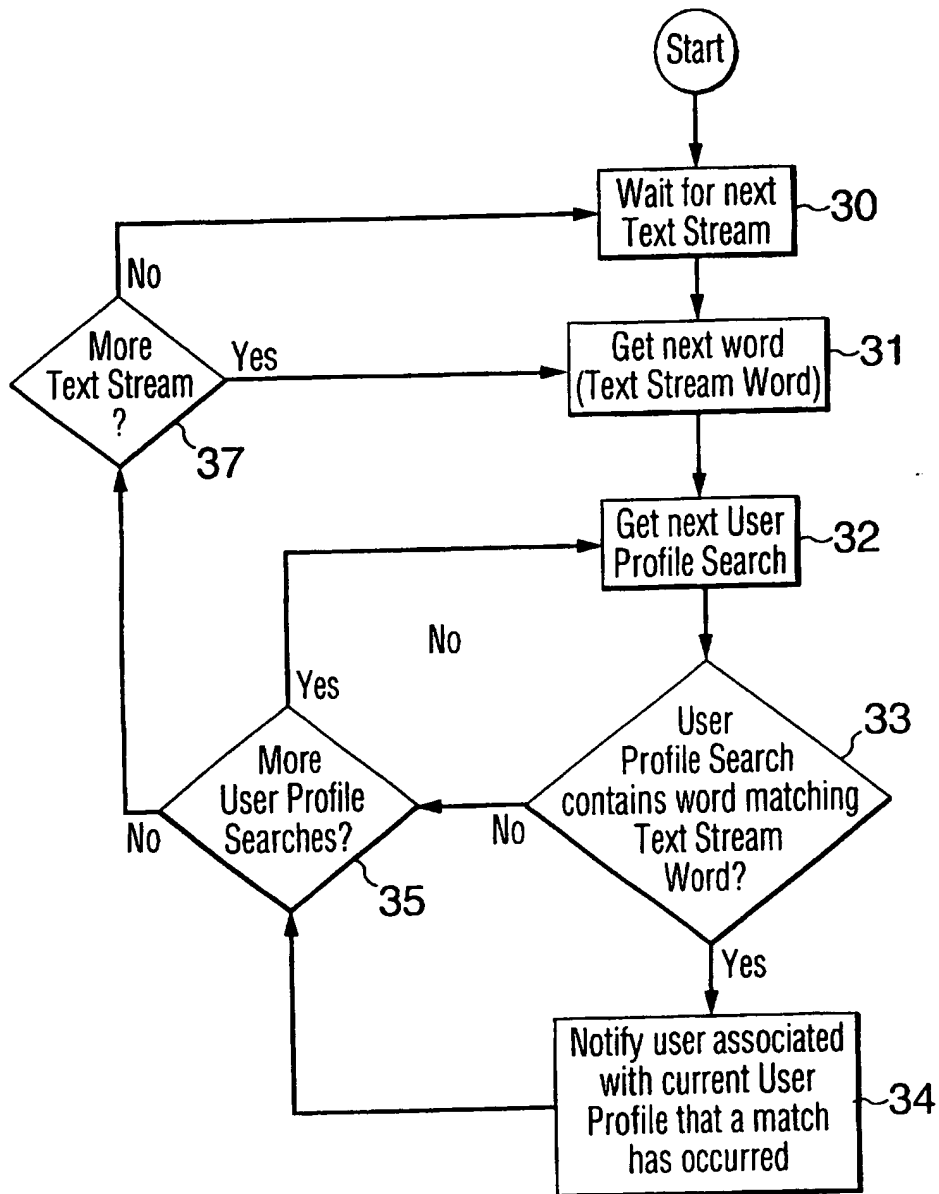


FIG. 3

# INTERNATIONAL SEARCH REPORT

International Application No  
PCT/CA 97/00571

A. CLASSIFICATION OF SUBJECT MATTER  
IPC 6 G06F17/30

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)  
IPC 6 G06F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	BUSSEY H E ET AL: "SERVICE ARCHITECTURE, PROTOTYPE DESCRIPTION, AND NETWORK IMPLICATIONS OF A PERSONALIZED INFORMATION GRAZING SERVICE" MULTIPLE FACETS OF INTEGRATION, SAN FRANCISCO, JUNE 3 - 7, 1990, vol. VOL. 3, no. CONF. 9, 3 June 1990, INSTITUTE OF ELECTRICAL AND ELECTRONIC ENGINEERS, pages 1046-1053, XP000164339 see the whole document --- -/--	1, 15

☒ Further documents are listed in the continuation of box C.

☐ Patent family members are listed in annex.

### \* Special categories of cited documents:

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

\*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

\*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

\*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

\*Z\* document member of the same patent family

Date of the actual completion of the international search

12 November 1997

Date of mailing of the international search report

01.12.97

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Katerbau, R



# INTERNATIONAL SEARCH REPORT

Inte xnal Application No

PCT/CA 97/00571

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WYLE M F: "A WIDE AREA NETWORK INFORMATION FILTER" PROCEEDINGS INTERNATIONAL CONFERENCE ARTIFICIAL INTELLIGENCE ON WALL STREET, 9 OCT. 1991, NEW YORK, 9 October 1991, pages 10-15, XP000534152 see the whole document	1,15
X	--- LANG K: "NewsWeeder: learning to filter netnews" MACHINE LEARNING. PROCEEDINGS OF THE TWELFTH INTERNATIONAL CONFERENCE ON MACHINE LEARNING. PROCEEDINGS OF 12TH INTERNATIONAL CONFERENCE ON MACHINE LEARNING, TAHOE CITY, CA, USA, 9-12 JULY 1995, 1995, SAN FRANCISCO, CA, USA, MORGAN KAUFMANN PUBLISHERS, USA, pages 331-339, XP002046557 see the whole document	1,15
X	--- ROSENFELD L B ET AL: "AUTOMATED FILTERING OF INTERNET POSTINGS" ONLINE, vol. 18, no. 3, May 1994, pages 27-30, XP000616769 see the whole document	1,15
X	--- YAN T W ET AL: "SIFT - A TOOL FOR WIDE-AREA INFORMATION DISSEMINATION" USENIX TECHNICAL CONFERENCE, 16 January 1995, pages 177-186, XP000617276 see the whole document -----	1,15